BEFORE THE BOARD OF COUNTY COMMISSIONERS

LEWIS COUNTY, WASHINGTON

IN THE MATTER OF ESTABLISHMENT OF	}	
2011 COUNTY ROAD CONSTRUCTION	}	**RESOLUTION NO. 11-001**
COUNTY FORCES PROJECTS	}	

WHEREAS, the Lewis County 2011-2016 Six Year Transportation Improvement Plan and 2011 Annual Construction Plan adopted via Resolution 10-295 on November 15, 2010 lists portions of 2011 construction projects to be constructed by County Forces; and

WHEREAS, per RCW 36.77.070 estimated County Forces project funds in excess of $10,000 must be published prior to construction.

NOW, THEREFORE BE IT RESOLVED, by the Board of County Commissioners that the following County Forces project funds are to be expended in the calendar year 2011, for the estimated costs shown and are hereby published in compliance with RCW 36.77.070. Costs shown do not include engineering, right of way expenses, or County Forces projects less than ten thousand dollars.

C.R.P. NO.	NAME OF PROJECT	COUNTY FORCES COST
2160	2011 Countywide 3R Program	$1,000,000
2046	Countywide Paths & Trails	$25,000
2161	2011 Countywide Misc. Safety & Guardrail	$25,000
2156	Meskill Road Improvements	$95,000
2157	Yates Road Improvements	$30,000
	TOTAL	$1,175,000

PASSED IN REGULAR SESSION this 3rd day of January, 2011.

APPROVED AS TO FORM:
Jonathan L. Meyer, Prosecuting Attorney

By: Deputy Prosecuting Attorney

ATTEST:

Clerk of the Board

BOARD OF COUNTY COMMISSIONERS
LEWIS COUNTY, WASHINGTON

Ron Averill, Chairman

F. Lee Grose, Vice Chairman

P.W. Schulte, Member

SEAL OF LEWIS COUNTY, WASHINGTON — BOARD OF COUNTY COMMISSIONERS — SINCE 1845 — WASHINGTON'S 1st COUNTY

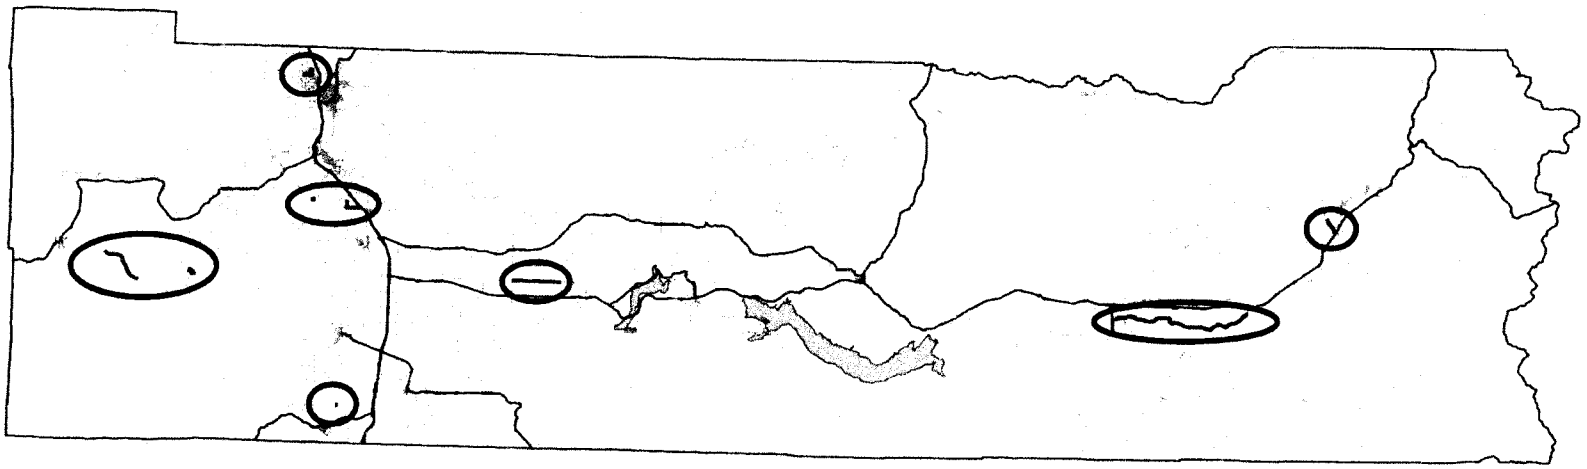

POTENTIAL CTB & BST PROJECT SITES:

Taylor Street
Van Wormer Street
Washington Way
Kahout Road
Roundtree Road
Urquhart Road
Tune Road
Pe Ell-McDonald Road
Gore Road
Cline Road

HMA PROJECTS:

Skate Creek Road South

Lewis County
Department of Public Works

County Forces Construction
2011 Countywide 3R Program, CRP - 2160
CTB, Chipseal, & HMA
vicinity map

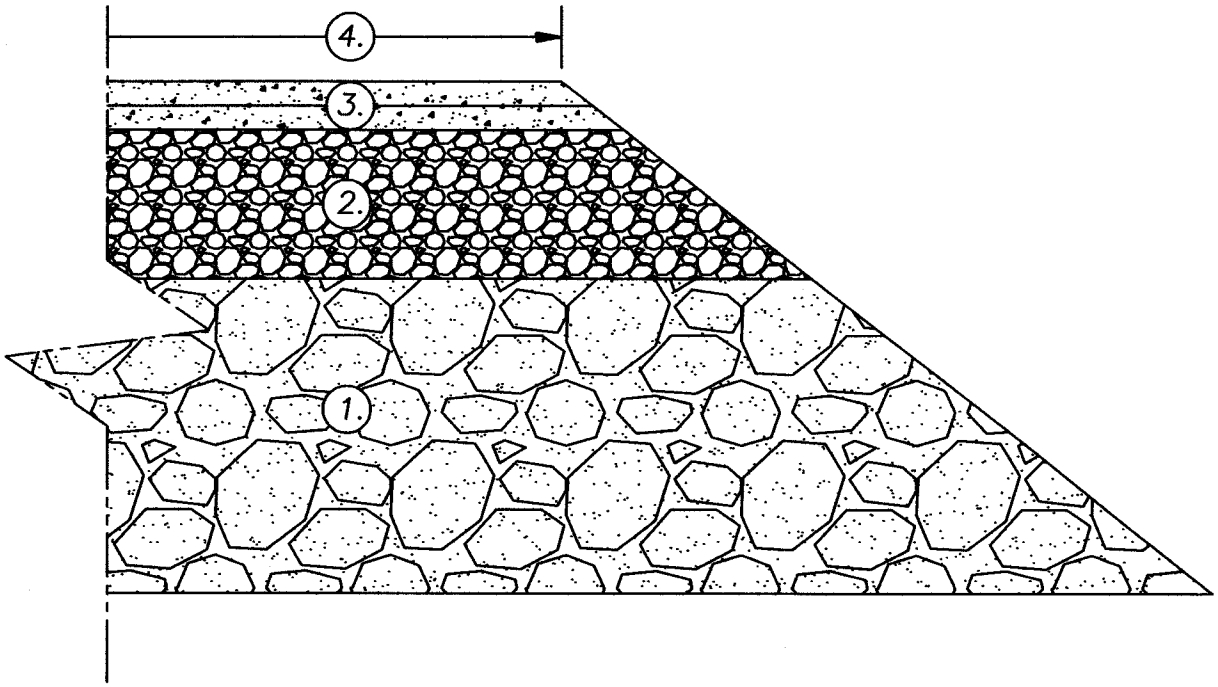

General Notes:

1. *Cement Treated Base Stabilization – Pulverize roadbed to a depth of approximately 0.70', apply Portland–Cement at a rate of approximately 6% of dry weight or 5.00 Lbs/sf, apply water and mix with pulverized roadbed, blade road to grade, and roll to achieve compaction.*

2. *Crushed Surfacing Top Course – Apply CSTC to a compacted depth of 0.30'.*

3. *Bituminous Surface Treatment – Apply two courses of BST.*

4. *Finished roadway width to match the preexisting roadway. No changes will be made to the horizontal or vertical alignment.*

Lewis County Department of Public Works	Lewis County DEPARTMENT OF PUBLIC WORKS	COUNTYWIDE 3R PROGRAM CTB & BST	CRP 2160 Revision Date 12–20–10

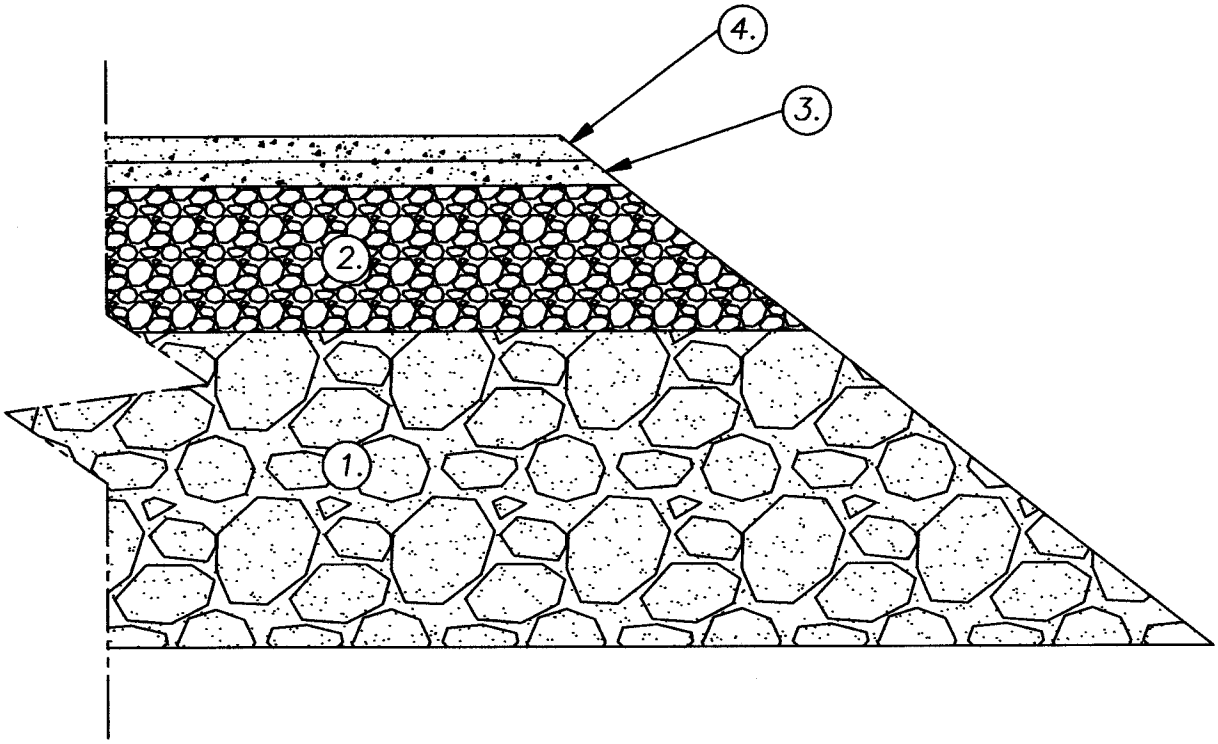

General Notes:

1. *Existing Base Course.*
2. *Existing Crushed Surfacing Top Course.*
3. *Existing Roadway Surfacing.*
4. *0.10', 0.15', 0.20', or 0.30' Course – Hot Mix Asphalt.*

Lewis County Department of Public Works	Lewis County DEPARTMENT OF PUBLIC WORKS	COUNTYWIDE 3R PROGRAM HMA	CRP 2160 Revision Date 12–20–10

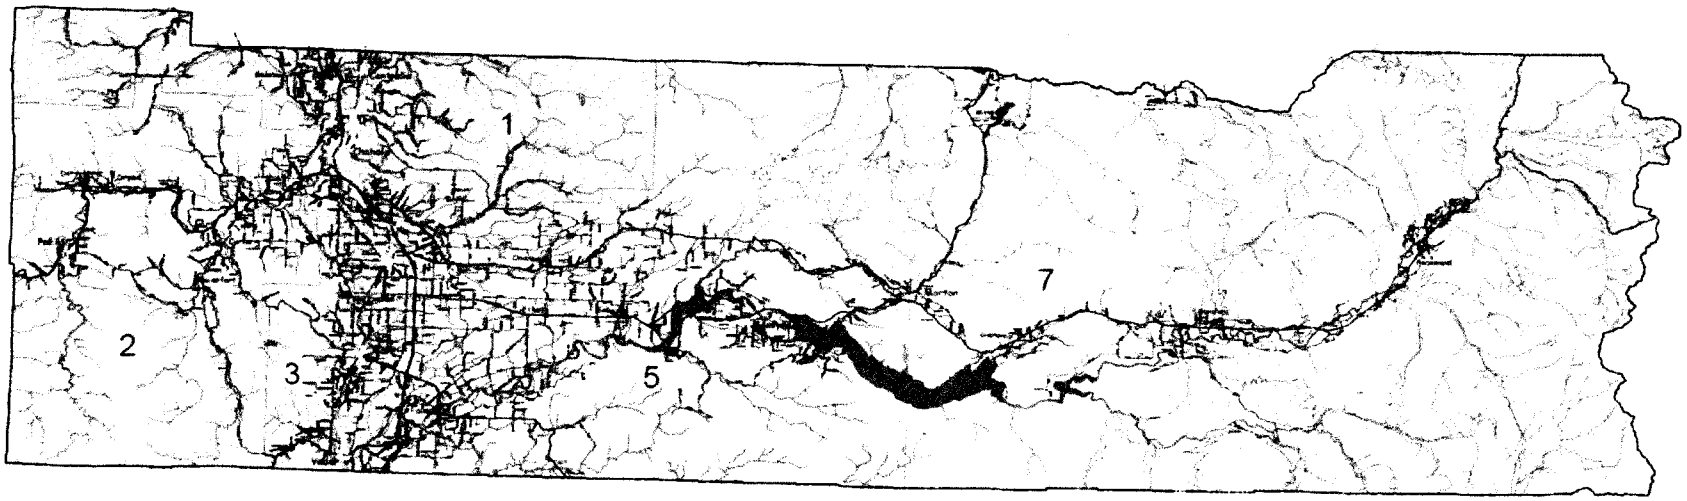

Road Maintenance Areas

Lewis County, Washington

Maintenance Area

1 2 3 5 7

Federal Land

Cities

Plans are not completed for these projects

Lewis County

Department of Public Works

County Forces Construction

Countywide Paths & Trails, CRP - 2046

2011 Countywide Misc. Safety & Guardrail, CRP - 2161

vicinity map

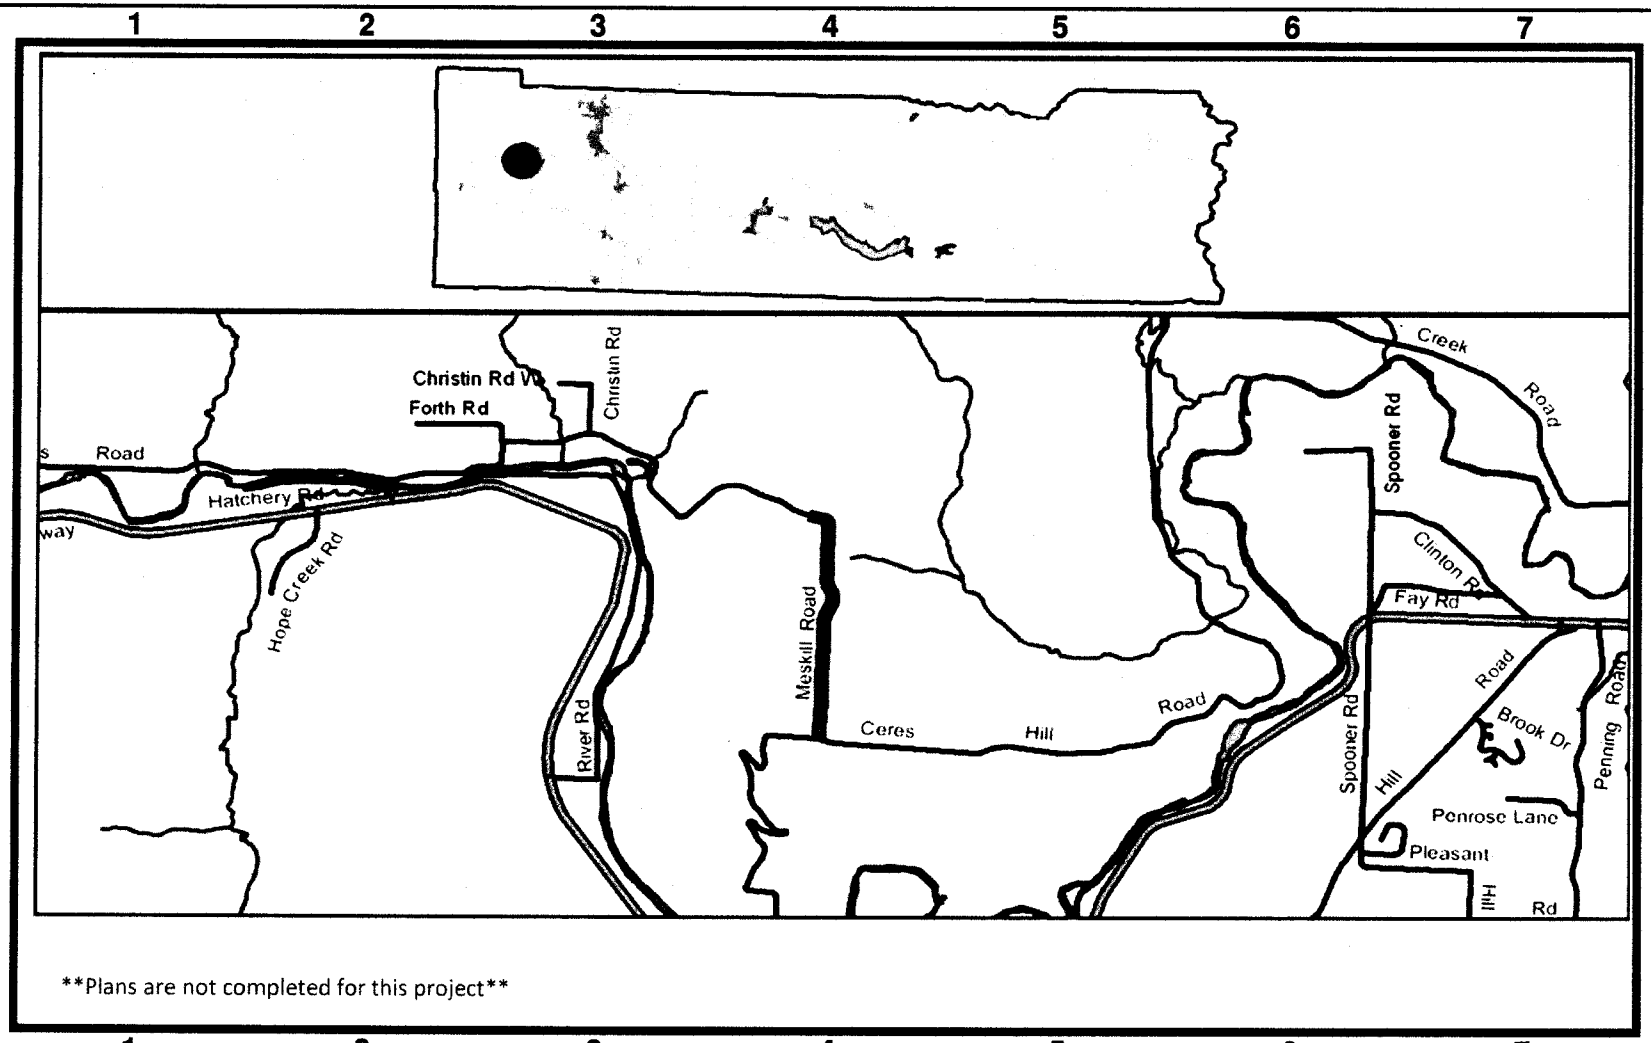

Lewis County

Department of Public Works

County Forces Construction

Meskill Road Improvements

CRP - 2156

vicinity map

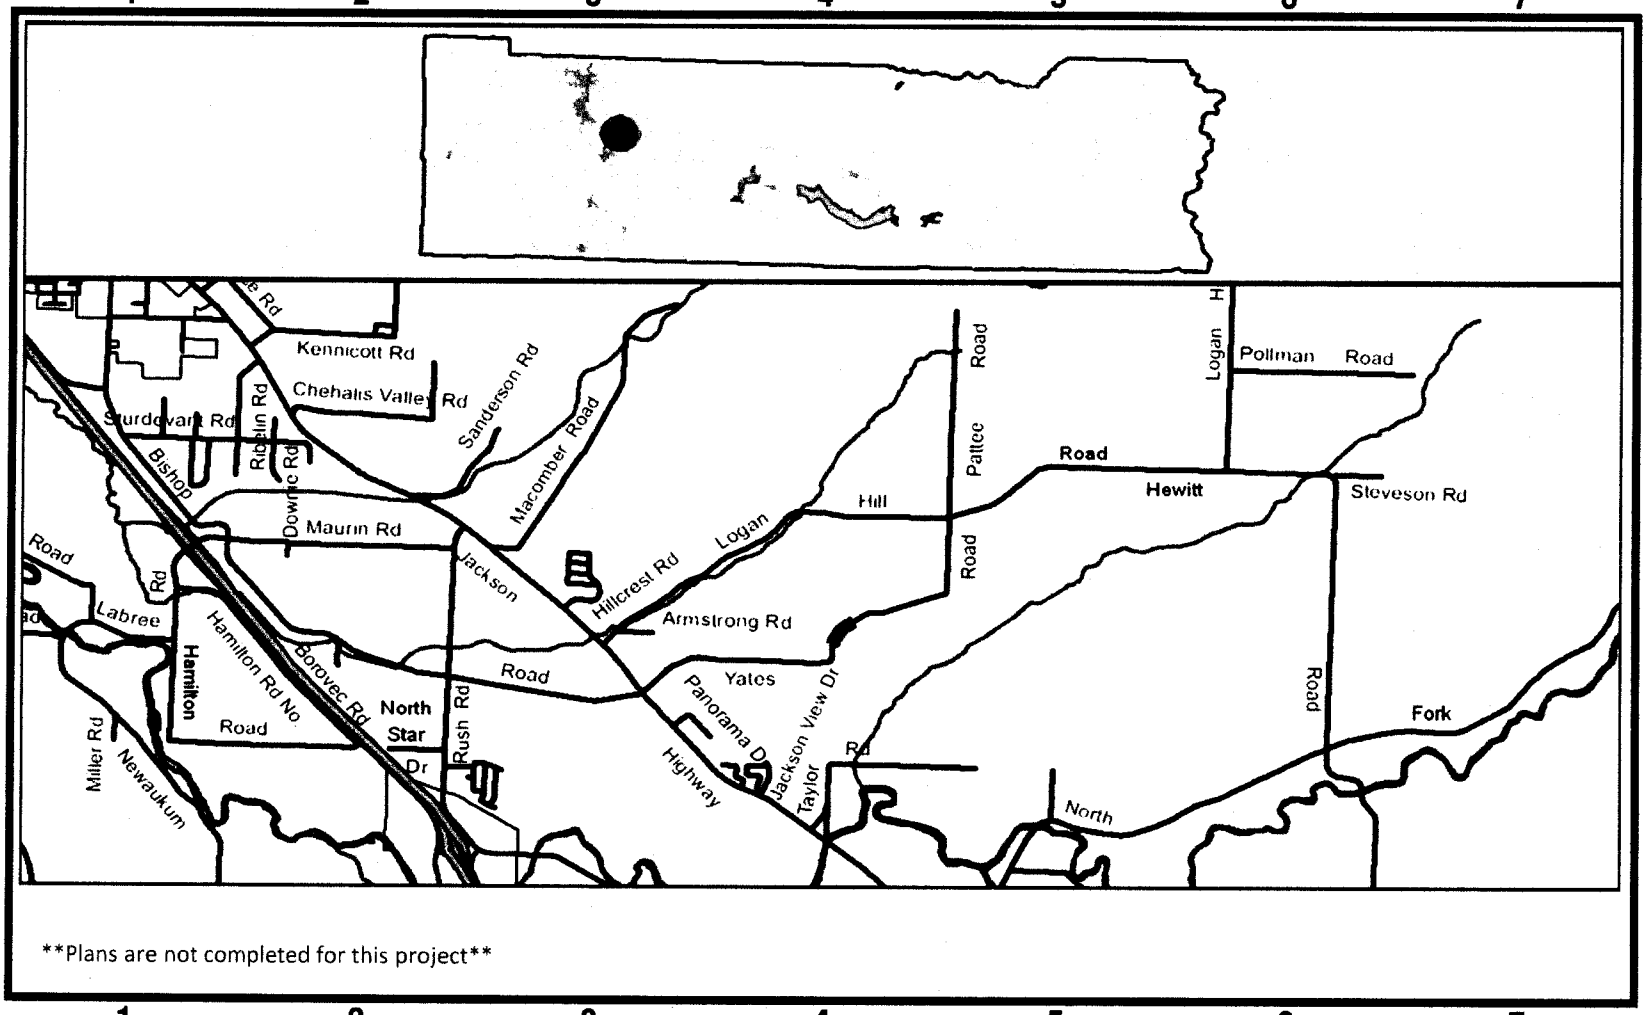

Plans are not completed for this project

Lewis County
Department of Public Works

County Forces Construction
Yates Road Improvements
CRP - 2157
vicinity map